


DHI-PHEOA3.91-RS



Features:

- Quick lock design, single person can complete installation.
- Front and rear maintenance, magnetic suction module design.
- The products include arc-shaped version and right angled version.

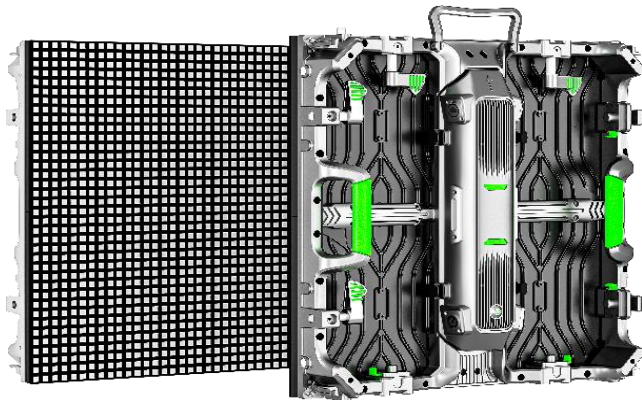

Technical Specification

Model

Model	DHI-PHEOA3.91-RS
-------	------------------

Parameters

Pixel Pitch	3.91mm
Physical Density	65536 pixels/m ²
LED Type	SMD1820
Module Resolution (W x H)	64 x 64
Module Size (W x H)	250mm x 250mm
Module Quantity	4
Module Weight	(0.68±0.1)kg
Cabinet Resolution	128 x 128
Cabinet Size (W x H)	500mm x 500mm
Cabinet Weight	(8±0.5) kg/panel
Maintenance	Rear
Cabinet Material	Die-Casting Aluminum
Brightness	4500nits
Viewing Angle	xH160°; V120°

Contrast Ratio	5000:1
Color Temperature	6000-10000K
Processing Depth	≥14 bits
Max. Power Consumption	750W/m ²
Avg. Power Consumption	250W/m ²
Input Voltage	AC100-240V
Frame changing frequency	50/60Hz
Refresh Rate	3840Hz
Control Mode	Synchronous or Assynchronous
Signal Input Source	RJ45
Control Distance	CAT5 Cable (L≤100m); multi-mode fiber (L≤300m); single mode fiber (L≤15km)
Operating Temperature/Humidity	-20°C~+45°C/10~90%RH
Storage Temperature/Humidity	-20°C~+45°C/10~90%RH
Ingress Protection	Front IP65/Rear IP54
Lifespan	≥100,000 h